




01-2015



UNI 5929 ISO 4029 DIN 916

VITI SENZA TESTA CON CAVA ESAGONALE
ED ESTREMITÀ A COPPA

HEXAGON SOCKET SET SCREWS WITH CUP POINT

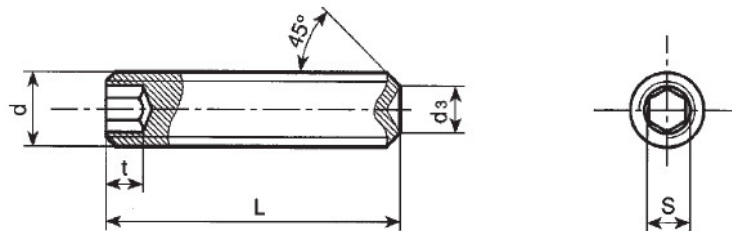

FILETTATURA METRICA ISO A PASSO GROSSO

Dimensioni in mm

| | | | | | | | | |
|---------------------|-------------|------------|-------------|------------|------------|------------|------------|------------|
| d | M1,6 | M2 | M2,5 | M3 | M4 | M5 | M6 | M8 |
| S | 0,7 | 0,9 | 1,3 | 1,5 | 2 | 2,5 | 3 | 4 |
| t | 0,7 - 1,5 | 0,8 - 1,7 | 1,2 - 2 | 1,2 - 2 | 1,5 - 2,5 | 2 - 3 | 2 - 3,5 | 3 - 5 |
| d3 (max-min) | 0,8 - 0,55 | 1 - 0,75 | 1,2 - 0,95 | 1,4 - 1,15 | 2 - 1,75 | 2,5 - 2,25 | 3 - 2,75 | 5 - 4,70 |
| d | M10 | M12 | M14 | M16 | M18 | M20 | M22 | M24 |
| S | 5 | 6 | 6 | 8 | 10 | 10 | 12 | 12 |
| t | 4 - 6 | 4,8 - 8 | 5,6 - 9 | 6,4 - 10 | 7,2 - 11 | 8 - 12 | 9 - 13,5 | 10 - 15 |
| d3 (max-min) | 6 - 5,70 | 7 - 7,64 | 8,5 - 8,14 | 10 - 9,64 | 11 - 10,57 | 13 - 12,57 | 15 - 14,57 | 16 - 15,57 |

Note: