




01-2015



UNI 1751 ISO - DIN 127B
ROSETTE ELASTICHE GROWER
A SEZIONE RETTANGOLARE CON BORDI TONDI
SPRING LOCK WASHERS

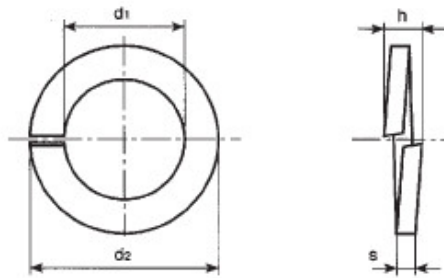

Dimensioni in mm

Diametro Vite	d1	d2	S	h
M3	3,2	5,8	0,8	1,6
M4	4,3	7,3	0,9	1,8
M5	5,3	8,9	1,2	2,4
M6	6,4	11,4	1,6	3,2
M7	7,4	12,4	1,6	3,2
M8	8,4	14,4	2	4
M10	10,5	17,5	2,2	4,4
M12	13	21	2,5	5
M14	15	24	3	6
M16	17	27	3,5	7
M18	19	29	3,5	7
M20	21	33	4	8
M22	23	35	4	8
M24	25	39	5	10
M27	28	42	5	10
M30	31	47	6	12
M33	34	54	6	12
M36	37	57	6	12
M39	40	60	6	12