




01-2015



UNI - ISO - DIN 6796
DISCHI SUPERELASTICI
PER BLOCCAGGIO DI VITI E BULLONI
CONICAL SPRING WASHERS FOR SCREWS ASSEMBLIES

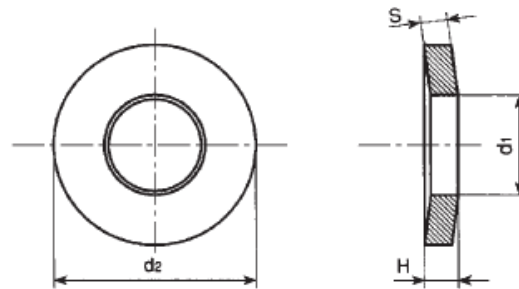

Dimensioni in mm

Diametro Vite	d1	d2	h		S
			max	min	
M3	3,2	7	0,85	0,72	0,6
M4	4,3	9	1,3	1,12	1
M5	5,3	11	1,55	1,35	1,2
M6	6,4	14	2	1,7	1,5
M8	8,4	18	2,6	2,24	2
M10	10,5	23	3,2	2,8	2,5
M12	13	29	3,95	3,43	3
M14	15	35	4,65	4,04	3,5
M16	17	39	5,25	4,58	4
M18	19	42	5,8	5,08	4,5
M20	21	45	6,4	5,6	5
M22	23	49	7,05	6,15	5,5
M24	25	56	7,75	6,77	6
M27	28	60	8,35	7,3	6,5
M30	31	70	9,2	8	7

Note: