




01-2015



UNI 6592 ISO 7089 DIN 125 A
ROSETTE PER VITI A TESTA ESAGONALE
E PER DADI ESAGONALI
PLAIN WASHERS PRIMARILY FOR HEXAGON BOLTS AND NUTS

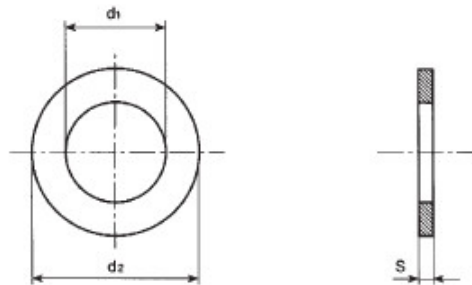

Dimensioni in mm:

Diametro Vite	d1	d2	S
M3	3,2	7	0,5
M4	4,3	9	0,8
M5	5,3	10	1
M6	6,4	12*	1,6
M7	7,4	14	1,6
M8	8,4	16*	1,6
M10	10,5	20*	2
M12	13	24	2,5
M14	15	28	2,5
M16	17	30	3
M18	19	34	3
M20	21	37	3
M22	23	39	3
M24	25	44	4
M26-	27	50	4

Diametro Vite	d1	d2	S
M27	28	50	4
M28	29	50	4
M30	31	56	4
M32-	33	60	5
M33	34	60	5
M35-	36	66	5
M36	37	66	5
M38-	39	72	6
M39	40	72	6
M40-	41	72	6
M42	43	78	7
M45	46	85	7
M48	48	92	8
M50	50	92	8
M52	52	98	8

- VALORI NON RIPORTATI NELLE NORME **UNI** E **ISO**

* NON COINCIDENTE CON LE NORME **UNI** E **DIN** CHE PREVEDONO,
 PER I VALORI NOMINALI **M6**, **M8** ED **M10**, UN DIAMETRO **d2** PARI A
 PARI A **12,5**, **17** E **21 mm**